


MCO

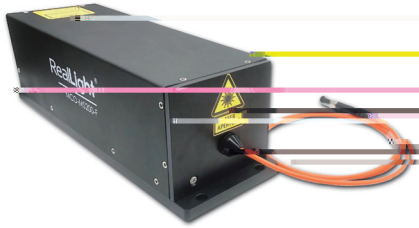

MCO RealSubns®

200 μ m/0.22NA


1ns
1~200Hz

100ps

光学参数				
(nm)	1064	532	355	266
(Hz)	1~200			
(μ J)	50	25	25	10
(ns)	1			
(rms)	3%			
	2%			
	100:1			
	200 μ m/0.22NA			
系统参数				
	24V DC			
	TTL0-5V SMB			
	RS-232			
(W)	<20			
(W)	<10			
(WxHxL,mm)	82x79x250			
()	15~35			
()	-10~60			

- 16~200Hz
- 90~260VAC
- 3.

MCO -  - 02 - 01

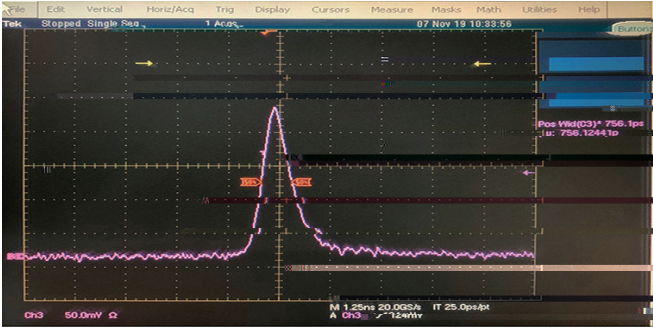

mm

